



**Trailer mounted lift**  
TM13G

# Trailer mounted lift TM13G

## STANDARD EQUIPMENT

- Basket leveling trough parallel rods
- Alu basket with wide tool tray, dual harness points and safety handrail
- Proportional electro hydraulic controls by fingertip joysticks
- Ground pressure sensors on all outrigger plates with audible and visible alarms
- Ground and upper controls with tarp cover
- EC type road approval E7\*2007/46\*0012\*00
- Manual recovery with hand pump
- Automatic reverse and overrun brakes plus handbrake
- Hourmeter
- 230 V outlet in the basket
- 1,3m Flyjib
- 230V outlet in the basket

## SPECIFICATIONS



Working height 13.1 m

Platform height 11.1 m

Outreach 6.2 m



Platform capacity 220 kg

Rotation (non continuous) 355°

Jib length 1.2 m

Platform dimensions 1,2x0,8x1,1 m



Platform rotation 2x45°



Transport length (A) 6,35 m

Transport width (B) 1,55 m

Transport height (C) 1,99 m



Gross weight (230V) 1470 kg

Gross weight (24V DC vers.) 1600 kg

Wheel assist weight add. 80 kg

Power generator 220 V 4 kV weight add. 100 kg

Power source (basic) 230 V 2,2 kw

Outrigger footprint (D) 3,3 m



Max. tow speed 100 km/h





Braking Automatic reverse and overrun brakes plus handbrake



Tyres 195 R 14 C

## OPTIONS

- Custom colour
- Honda power
- Battery power 24V 220 Ah
- Wheel assist
- Flashing beacons on outriggers and basket
- On-board 230 V Generator 4 KV
- G.R.P. basket with tool tray (2 man)
- Outrigger plate pads 400x400x30

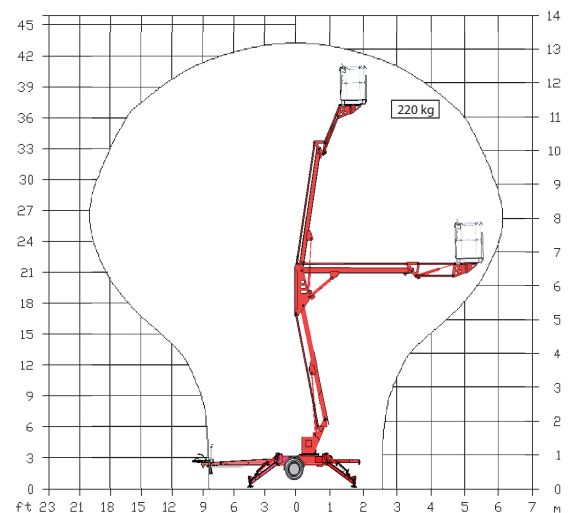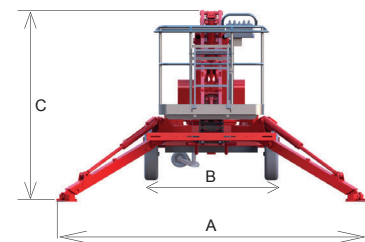

[www.instant.no](http://www.instant.no)

**INSTANT**

**Norway**

Tel.: +47 23 19 11 00  
info@instant.no

**Lithuania**

Tel.: +370 5 233 1096  
info@instant.lt

**Latvia**

Tel.: +371 263 58 152  
info@instantlatvija.lv

**Estonia**

Tel.: +372 680 76 33  
info@instant.ee