

**Tracked platform**  
TR18GT

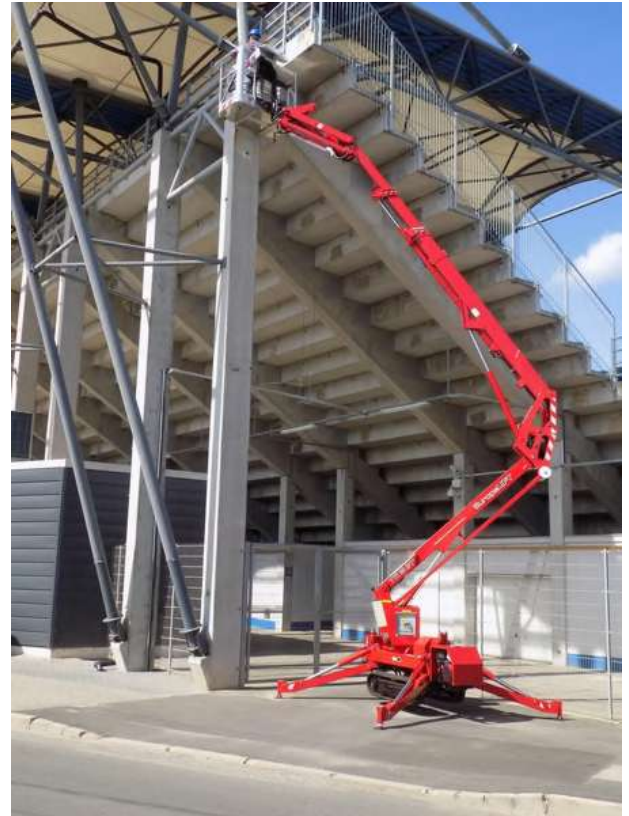
# Tracked platform TR18GT

## Standard features:





- working height : 18m
- side reach 10,5m (100kg)
- non marking tracks
- manual adjustable tracks in width and height
- hydraulic platform rotator
- auto chassis leveling
- aluminium basket with handguard rail and tool tray
- proportional electro-hydraulic controls by fingertip joysticks
- 230 V & Honda iGX390 power supply
- (electric motor speed control)
- cable remote controls for the tracks
- outrigger ground pressure sensors with accoustic and visual alarms
- ground and upper controls
- chassis level sensor 1 o with accoustic alarm
- 230V socket in basket
- ground and upper controls with tarpaulin cover
- hourmeter
- manual emergency handpump
- machine colour RAL 3002 (red)
- 620 mm diamater slewing ring

## Options

- outrigger plates
- air/water hose to platform
- flashing beacons on outriggers



## Dimensions

	platform capacity .....	<b>220 kg</b>
	Working height .....	<b>18 m</b>
	platform height .....	<b>16 m</b>
	Horizontal reach (220 kg) .....	<b>8 m</b>
	Transport length .....	<b>5.46 m</b>
	Transport width .....	<b>0.79 m</b>
	Transport height .....	<b>1.99 m</b>
	Weight .....	<b>2450 kg</b>



[www.instant.no](http://www.instant.no)

**INSTANT**

**Norway**

Tel.: +47 23 19 11 00  
info@instant.no

**Lithuania**

Tel.: +370 5 233 1096  
info@instant.lt

**Latvia**

Tel.: + 371 263 58 152  
info@instantlatvija.lv

**Estonia**

Tel.: +372 680 76 33  
info@instant.ee